



FINAL CHARGE® GLOBAL COOLANT / ANTIFREEZE

DESCRIPTION:

FINAL CHARGE® Global Extended Life Coolant/Antifreeze is an Organic Acid Technology (OAT), globally formulated, ethylene glycol based coolant, which uses organic acid inhibitors (non 2-EH) to provide guaranteed protection for all cooling system metals. With proper maintenance,* Final Charge Global Extended Life Coolant/Antifreeze delivers guaranteed cooling system protection for ONE MILLION MILES of on-road use (8 years or 20,000 hours of off-road use) without the use of Supplemental Coolant Additives (SCAs). Final Charge Global Extended Life Coolant/Antifreeze is nitrite-free, phosphate-free, silicate-free and borate-free.

BENEFITS:

- Works in ALL heavy-duty diesel, gasoline and natural gas engine cooling systems
- Guaranteed protection for ONE MILLION MILES of on-road use (8 years or 20,000 hours of off-road use)*
- Eliminates the need for SCAs and chemically charged filters
- Excellent heat transfer for high temperature applications such as engines with EGR and SCR systems
- Outstanding protection against corrosion and cavitation
- Non-abrasive formula can improve water pump seal life
- Eliminates drop-out, gel and reduces scale
- Can be mixed with other coolants (to maintain corrosion protection contamination levels should be kept below 25%)
- Provides exceptional long term elastomer compatibility

PROPERTIES:

	ASTM D6210/D3306 Specification	Typical Values for Concentrate	Typical Values for 50/50 Pre-Diluted
Specific Gravity 60/60 °F	D1122	1.135	1.080
Freezing Point, 50% Vol.	D1177	-34 °F (-37 °C)	-34 °F (-37 °C)
Boiling Point, 50% Vol.	D1120	226 °F (108 °C)	226 °F (108 °C)
pH, 50 Vol. %	D1121	8.5	8.5
Reserve Alkalinity	D1123	10	4.5
Ash Content	D1119	2	1
Color	—	Red	Red

* Proper maintenance requires a complete cooling system flush and fill - and subsequent topping off, as needed - with Final Charge Global Extended Life 50/50 Pre-diluted Coolant/Antifreeze or Final Charge Global Extended Life Coolant/Antifreeze and water. For guaranteed protection, no other products or product supplements may be used. For all warranty details please visit www.peakhd.com. Follow OEM recommendations for specified maintenance.



Meets these specifications:

- | | |
|-------------------------|-----------------------------------------------------------------|
| • CAT EC-1 | • BEHR RADIATOR |
| • CUMMINS CES 14603 | • ASTM D6210 |
| • DETROIT DIESEL 93K217 | • NAVISTAR CEMS-B1-TYPE IIIA |
| • MAN 324 TYP SNF | • ASTM DA7583 (JOHN DEERE COOLANT CAVITATION TEST) / ASTM D6210 |
| • MTU 5048 | |
| • MERCEDES DBL 7700 | |
| • MERCEDES 325.3 | |

Meets these performance requirements:

- | | |
|---------------------------|--------------|
| • JOHN DEERE H24A1, H24C1 | • VOLVO/MACK |
| • PACCAR | • TMC RP 329 |

FREEZE/BOIL PROTECTION CHART	% of Cooling System Capacity	PROTECTS FROM	
		Freezing Down to	Boiling Up to*
	50	-34 °F	265 °F
	60	-62 °F	270 °F
	70	-84 °F	276 °F

*At sea level atmospheric pressure with 15lb. pressure cap. The boiling point decreases about 2 °F per 1,000 feet of altitude and increases about 2.5 °F per pound developed in the system.



FXAOB1
55 Gallon Concentrate Drum
 UPC: 074804-02067-0



FXAB51
55 Gallon 50/50 Drum
 UPC: 074804-02068-7



FXAOB3
1 Gallon Concentrate Bottle
 Gallon UPC: 074804-00836-4
 Case UPC: 074804-10836-1
 Case SCC 14: 1-0074804-00836-1



FXAB53
1 Gallon 50/50 Bottle
 Gallon UPC: 074804-00358-1
 Case UPC: 074804-10358-8
 Case SCC 14: 1-0074804-00358-8

FXAOB0
Bulk Concentrate

FXAB50
Bulk Concentrate


Part #	UNIT	Pack/Size	Case/Drum Dimensions	Unit Wt(lbs)	Units per Pallet	Pallets per Truck	Pallet Weight
FXAOB1	Drum	55 gal	23.5" dia. x 34.5"h	559.00	4	20	2,286
FXAB51	Drum	55 gal	23.5" dia. x 34.5"h	543.00	4	20	2,222
FXAOB3	Case	6/1 gal	16" l x 12.5" w x 12.5" h	60.50	36	20	2,228
FXAB53	Case	6/1 gal	16" l x 12.5" w x 12.5" h	57.00	36	20	2,102

(*) Includes Pallet Wt.: 20 @ 50 lbs. ea. = 1,000 lbs. Product Liability Information/Material Safety Data available upon request.
 To order, please call Old World Industries, LLC Customer Service at 1-800-323-8755.

PEAK Commercial & Industrial products have been trusted by fleets, large and small, for over 65 years, to keep their equipment running.



Clint Bowyer

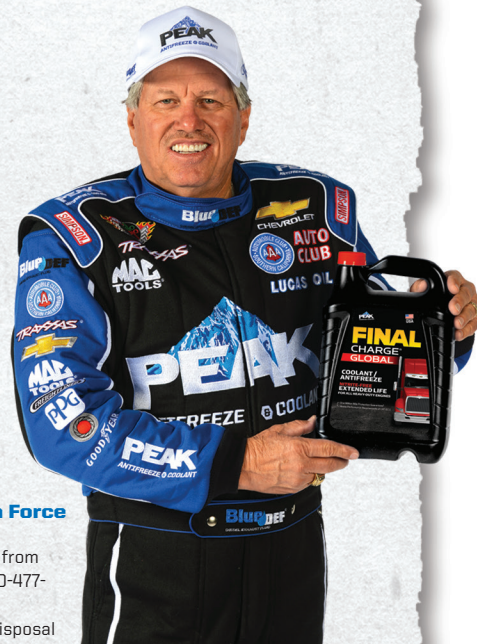


John Force



peakhd.com

HANDLING AND SAFETY INFORMATION Refer to Old World Industries Material Safety Data Sheet (MSDS). The MSDS is available from your PEAK Performance Supplier at www.peakauto.com, or by calling Old World Industries' PEAK technical support line at 1-800-477-5847. We Only Have One World...Please Help Protect It. All laws and regulations should be observed when disposing of Antifreeze/Coolant and Radiator Fluids. Call the EPA or the office of your state or local environmental agency for details on disposal procedures



We Support
Be Car Care Aware
www.beccare.org

Distributed by Old World Industries, LLC Northbrook, IL 60062
p 800.323.5440 www.peakauto.com
 ©2015 PEAK and the PEAK Mountain Graphic are Registered Trademarks of Old World Industries, LLC.

RUN TRUE™